

**BOOSTER C 6 - 25 - 55**  
max 350 Bar / 5070 psi, 3 cylinder, 2/3 stages



BASIC VERSION											
Model	F.A.D.		Nr. of stages	Speed rpm	Power kW	Phase	Purification system	Weight		Dimensions L x W x H	Price EUR
	l/min	l/min						Kg	lbr		
<b>Electric motor</b>											
BON2-6-350-C	60 @ 50 mbar		3	650	2.2	Three	PAC 3	264	582	75 x 93 x 123	16.235,00
BON2-25-350-C	120 @ 7bar		2	730	4.0	Three	PAC 3	264	582	75 x 93 x 123	16.235,00
BON2-55-350-C	140	550	2	1350	5.5	Three	PAC 3	264	582	75 x 93 x 123	16.235,00

In case of order please specify :

- Operating pressure : Max pressure 350 bar/5070 psi
- Connection Type with standard tube for stock gas or for manual charge gas
- Operating voltage 3-Phase:230V/50Hz - 230V/60Hz - 400V/50Hz - 400V/60Hz - 440V/50Hz - 440V/60Hz - 480V/50Hz - 480V/60Hz


In case this information is not provided, the price will be calculated with standard configuration

OPTIONAL EQUIPMENT	Price EUR
Oil Pump Lubrication	INCLUDED
Automatic condensate drain, Electric control panel	INCLUDED
Soft Start	1.400,00
Suction Filter 50 micron G1"- (PA001-219)	198,00
Atex Certificate Zone II	4.875,00

All prices are quoted in euros EX-WORKS (Incoterms ICC 2020).

## BOOSTER M 55

max 350 Bar / 5070 psi, 3 cylinders, 2 stages

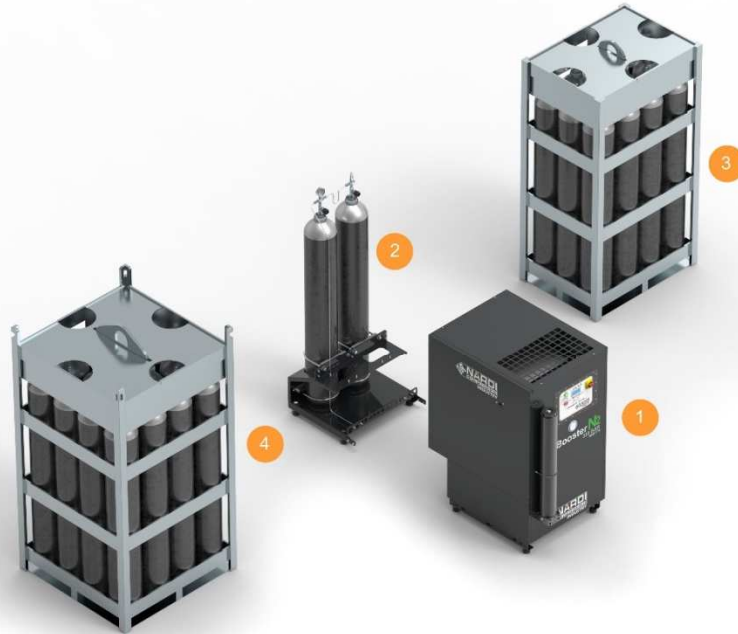

### BASIC VERSION

Model	F.A.D.		Speed rpm	Power kW	Phase	Purification system	Weight		Dimensions L x W x H	Price EUR
	l/min	l/min					Kg	lbr		
BON2-55-350	140	550	1350	5.5	Three	PAC 3	264	582	75x108x134	19.485,00

In case of order please specify :

- Operating pressure : Max pressure 350 bar/5070 psi
- Connection Type with standard tube for stock gas or for manual charge gas
- Operating voltage 3-Phase: 230V/50Hz - 230V/60Hz - 400V/50Hz - 400V/60Hz - 440V/50Hz - 440V/60Hz - 480V/50Hz - 480V/60Hz

In case this information is not provided, the price will be calculated with standard configuration

### OPTIONAL EQUIPMENT

	Price EUR
Oil Pump Lubrication	INCLUDED
Automatic condensate drain, Electric control panel	INCLUDED
Soft Start	1.400,00
Suction Filter 50 micron G1"– (PA001-219)	198,00
Atex Certificate Zone II	2.750,00

All prices are quoted in euros EX-WORKS (Incoterms ICC 2020).

## BOOSTER MX 140 - 160

max 350 Bar / 5070 psi, 3 cylinders, 2 stages



BASIC COMPRESSOR										
Model	F.A.D.		Speed rpm	Power kW	Phase	Purification system	Weight		Dimensions L x W x H	Price EUR
	l/min min	l/min max					Kg	lbr		
Electric motor										
BON2-140-350	350	1400	1250	11	three	Double PAC 3	520	1144	87 x 152 x 172	37.380,00
BON2-160-350	303	854	1250	11	three	Double PAC 3	520	1144	87 x 152 x 172	38.000,00

In case of order please specify :

- Operating pressure : Max pressure 350 bar/5070 psi
- Connection Type with standard tube for stock gas or for manual charge gas
- Operating voltage 3-Phase: 230V/50Hz - 230V/60Hz - 400V/50Hz - 400V/60Hz - 440V/50Hz - 440V/60Hz - 480V/50Hz - 480V/60Hz

In case this information is not provided, the price will be calculated with standard configuration

OPTIONAL EQUIPMENT	Price EUR
Oil Pump Lubrication	INCLUDED
Supplementary Filtering System (PAC Filter 3)	INCLUDED
Automatic condensate drain, Electric control panel	INCLUDED
Soft Start	INCLUDED
Suction Filter 50 micron G1"- (PA001-219)	198,00
Atex Certificate Zone II	4.875,00

All prices are quoted in euros EX-WORKS (Incoterms ICC 2020).